



## ESD Vinyl Sheet Flooring – Premium ESD Vinyl Sheet Flooring

Staticworx vinyl sheet flooring is ideal for the following applications: clean rooms, electronics manufacturing, data centers, or anywhere a seamless ESD floor is necessary. Permanently conductive, never requiring wax, this flooring requires little maintenance.

### Standard Colors

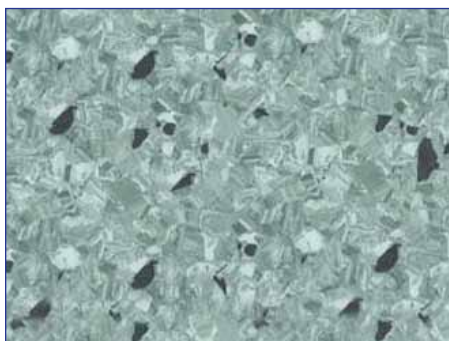

Caribe

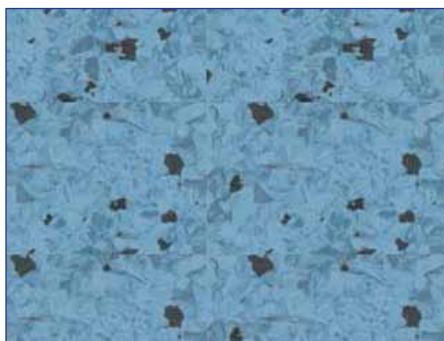

Bali



Licorice



Linen



Serenade



Shale

# Vinyl Sheet Series

## Premium ESD Vinyl Sheet Flooring Systems

	Test Method	ESD Vinyl Sheet Flooring
<b>Composition</b>		Homogeneous
<b>Thickness</b>	ASTM F1913-04, EN 428	0.080 inches, 2.0 mm standard size
<b>Sheet Size</b>	ASTM F1913-04, EN 426	6.5 ft. x 82.5 ft., 2 m x 25 m
<b>Weight</b>	EN 430	6.44 lbs./sq. yd., 3.50 kg/m <sup>2</sup>
<b>Residual Indentation</b>	ASTM F 970, EN 433	Static load 800 psi < 0.1 mm
<b>Flexibility</b>	ASTM F 137	Pass
<b>Dimensional Stability</b>	ASTM F 2199, EN 434	Pass, < 0.4 mm
<b>Electrical Resistance</b>	ESD S7.1, EN 1081	$2.5 \times 10^4 - 1.0 \times 10^6$ , < $10^6$ W
<b>Static Generation</b>	ESD S97.2, EN 1815	< 10 V, < 2.0 kV
<b>Resistance to Chemicals</b>	ASTM F 925, EN 423	Pass, Good Resistance
<b>Thermal Resistance</b>	ISO 8302 (EN 12664)	< 0.00512 m <sup>2</sup> K/W
<b>Light Fastness</b>	ASTM F 1515, EN 20105: B02	Pass, Blue Wool Standard 6
<b>Chair Castor</b>	EN 425	Continuous Use
<b>Smoke Density</b>	ASTM E 662-05	< 450
<b>Flammability</b>	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 ASTM E648-06	Class Bfl-S1 $\geq 8$ kw/m <sup>2</sup> Pass Type 1
<b>Abrasion Resistance</b>	EN 660-2 ASTM D3384	Wear Group P Pass
<b>Slip Resistance</b>	EN 13893 DIN 51130 ASTM D 2047	Class DS R10 > 0.7
<b>Fungi / Bacterial Resistance</b>		Does Not Support Growth
<b>Clean Rooms</b>	ASTM F51-68	Class A - Non Shedding
<b>Maritiem Usage</b>	US Coast Guard Approved Marine Equipment Directive IMO RES A 653 (16) IMO MSC 61 (67) Annex 1 Part 2 (Smoke & Toxicity) Part 5 (Spread of Flame) and Annex 2 (Surface Flammability / Heat Release) *1121	

### Properties Include:

- Seamless
- Meets ANSI S20.20
- Low maintenance requirements—never requires wax
- Durable construction
- Anti static, permanent conductive properties
- Slip resistant
- Chemical resistant
- Polyurethane reinforced product (PUR) reduces porosity for lower maintenance
- Can be installed with standard adhesives
- Flash cove installation amenable