

SHADOWFX™ SDC PATTERNS

Always dissipative, never conductive.

SHADOWFX SDC — CONSTRUCTED OF PREMIUM BRANDED YARN
FOR DEMANDING ESD APPLICATIONS AND 24/7 ENVIRONMENTS.



STOCK COLORS

4109 Forest Floor 24"




4112 Appalachian Trail 24"



NON-STOCK COLORS*

4110 Lake Tahoe 24"

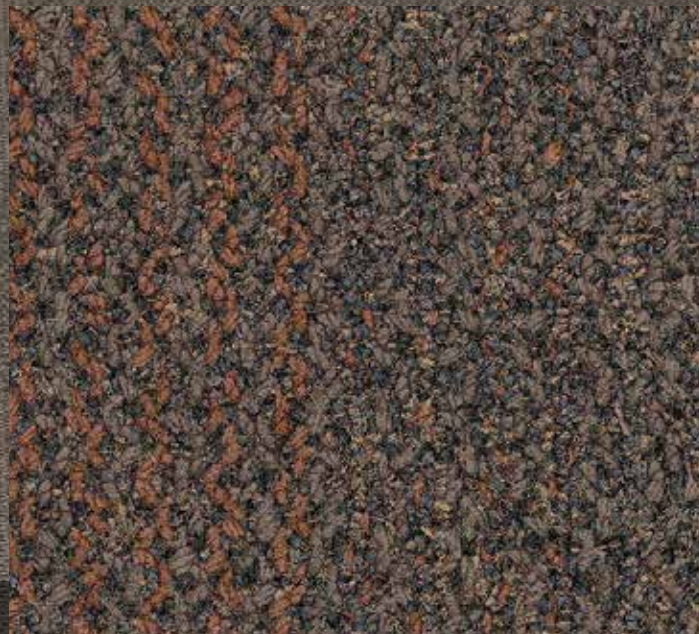

9358 Cobblestone 24"



24" Available in 24" Carpet Tile

*More non-stock colors available. Visit Staticworx.com to view all 18 available color options.

flooring that keeps you grounded

SPECIFICATIONS

Construction: Tufted textured loop

Yarn weight: 15 oz./sq. yd. (509 g/sm)

Fiber Modification Ratio: 1.7 to 1.9

Sizes: 24" x 24"

Electrical resistance:

ESD S7.1/NFPA 99 Resistive Characterization of Materials:

Nine or more readings between electrodes placed 1 foot apart. Tested with an applied voltage of 100V. Measured in Ohms, $1.0 \times 10^6 - 1.0 \times 10^9$. Meets Motorola R56 and ATIS-0600321 for use in telecommunications applications. Meets FAA STD 019e for use in flight control applications.

Approved for EPAs per ANSI/ESD S20.20

- System resistance per ANSI/ESD S97.1 $< 3.5 \times 10^7$
- Charge generation per ANSI/ESD S97.2 < 100 volts

Roller Caster Electrical Test (CET) proven. Product meets ANSI/ESD S20.20 after 125,000 cycles.

SHADOWFX™ SDC PATTERNS Carpet Tile

Meets GroundSafe criteria for use around operational electronics, computers and telecommunications equipment.

- Lifetime static control
- Multiple height tip shear loops eliminate unsightly seams
- Ideal for installation over bare concrete and access floors
- 52% recycled content (50% post-industrial, 2% post-consumer)
- Green Label Plus – Certified




Meets the following standards:

- Motorola R56: For use in 9-1-1 dispatch facilities
- FAA STD 019e: For flight control applications
- NFPA 99: For use in healthcare facilities
- ASTI-0600321.2010: For telecommunications rooms
- ANSI/ESD S20.20-2007: For electronics handling

The Concept of Pattern Diversity

The pleasing seamless surfaces of leaves scattered on a forest floor has become a model for the way carpet tiles are designed and manufactured. With ShadowFX SDC Patterns, no two carpet tiles are identical, and can be repaired and replaced with much greater success and ease than standardized tiles.



Non-Directional
Installation



GROUNDBRIDGE™

FAST, GLUELESS, ODORLESS INSTALLATIONS— IDEAL OPTION FOR OCCUPIED WORKSPACES

Roll out GroundBridge strips, a lightweight material of conductive cellulose. Create a floating floor by joining the corners of ShadowFX carpet tiles using dimensionally-strong, self-adhering TacTiles®. Done.

- Virtually eliminates VOCs — no need to shuffle employees to different work areas or endure downtime and disruptions.
- Desk-lifting equipment permits quicker installations without removing existing furniture.
- No buckets of glue, no mess — easy, fast, clean installations & tile replacement.